



AXIS 2110 Network Camera

Your Virtual Eye

The AXIS 2110 Network Camera is an affordable tool for creating high-quality imaging applications using the Web. The AXIS 2110 enables publishing of promotional live video over the Internet, broadcasting of live events, remote monitoring of the office, and much more. It connects as a standalone unit directly to a network, or modem, to generate images that can be viewed within a standard Web browser - from anywhere.

Unlike a simple Webcam, it includes a built-in Web server and plugs directly to a network, or modem - with no PC or additional software required. Complete with a quality lens, it can be used indoors, or installed into a weatherproof enclosure for outdoor usage.



- Remote Monitoring and Web Attraction
- In- and outdoor use
- "Plug and Watch" –over any TCP/IP network
- High-quality images - up to 15 frames/sec

Technical Specification - AXIS 2110 Network Camera

Product Features

- Quick and easy installation: Simply connect to your network and assign an IP-address.
- Built-in Web Server and network interface. No PC needed for operation.
- Up to 15 frames/sec.
- Linux-based operating system
- Accepts Dial-in and Dial-out access via external modem (modem not included).
- Event triggered remote image storage via e-mail and FTP.
- High speed hardware-based image compression, generating high quality JPEG images.
- 100 MIPS RISC processor for high performance.
- Password/username protection for restricted camera access.
- Bandwidth control prevents data saturation on the network. 15 frames/sec. typically requires about 1.5 Mbit/sec.
- Flash memory for simple upgrades.
- Compatible with operating systems such as Windows 95, Windows 98, Windows 2000, Windows NT, Windows ME, Linux and Mac OS and Mac OS X.

System Requirements

- Internet Explorer 4.x, 5.x, 6.x or Netscape Navigator 4.x. Non-network, i.e. modem installation requires Windows PC with Dial-up networking.

Operating Environment

- Requires proper environmental housing for outdoor use, 40-105°F (5-40°C). 20-80% RHG, non-condensing.
- The manual iris lens must be used and correctly configured for use in environments where strong light conditions prevail. Avoid aiming the camera directly towards extremely bright objects such as the sun, as this may damage the CCD image sensor.

Image

- JPEG still images and Motion-JPEG video.
- 4 levels of compression are available. The file size of a JPEG compressed image depends on the actual content of the image. Images containing a lot of detail will generate larger files. Image quality is controlled through the level of compression. High compression yields smaller files at the expense of image quality, while low compression results in larger files, but maintains image quality. The table below shows average file sizes, derived from real life tests.

Resolution	Compression Level			
	Lowest	Low	Medium	High
640x480	250kb	20kb	13kb	8kb
320x240	70kb	8kb	5kb	3kb

Technical Specification

- Digital, 24-bit color.
- Image sensor: 1/4" inch HAD RGB progressive scan CCD.
- HxV: 640x480.
- Backlight Compensation.
- Automatic AGC.
- White Balance: Automatic, Fixed Indoor, Fixed Fluorescent, Fixed Outdoor, Hold.
- Exposure times 1-1/30,000s.
- Maximum Illumination: 200,000 Lux.
- Minimum Illumination: 3 Lux.
- 8 MB RAM .
- 2 MB FLASH PROM
- ETRAX 100 LX, 32 bit RISC, 100 MIPS CPU.
- Hidden push-key for focus and factory defaults.
- Standard CS mount 3.5-8mm lens, F 1.4 vari-focal zoom lens with manual iris (equivalent to 30-80 mm on a standard 35mm camera).

Supported Protocols


- Including TCP/IP, HTTP, FTP, SMTP, ARP, BOOTP, PPP, CHAP, PAP, DHCP and more



Connections

- External power supply 12V AC (included). Power consumption max 7W.
- Modem connection RS-232 modem connector for dial-up use. Supports most V90 modems.
- Input/Output connector to trigger the camera on external events.
- RJ 45 Twisted Pair cable, 10/100 MBit Ethernet network connection.

Light Condition Adaptive Frame Rate

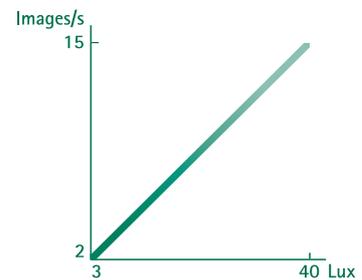

Metrics

- Height: 1.6 in (4.1 cm).
- Width: 4.0 in (10.2 cm).
- Length: 6.9 in (17.5 cm).
- 0.6 lb. (0.26 kg), excl. powersupply and tripod.

Approvals

- EMC: CE EN 55022 class B, EN55024.
- FCC Class A.
- Safety: EN 60950, UL, CSA.

Accessories Included

- Null modem cable.
- Power supply: 12V AC, 9.6 VA.
- Power cord extension cable.
- I/O connectors.
- Rugged metal tripod.



For more information visit our website: www.axis.com

AXIS Communications
Office Locations

LUND:
Phone: +46 46 272 18 00

BOSTON:
Phone: +1 978 614 20 00

MIAMI:
Phone: +1 305 860 8226

MONTAIN VIEW
Phone: +1 650 903 2221

LONDON:
Phone: +44 870 162 0047

MADRID:
Phone: +34 91 803 46 43

MUNICH:
Phone: +49 811 555 0810

PARIS:
Phone: +33 1 49 69 15 50

ROTTERDAM:
Phone: +31 10 444 34 34

TURIN:
Phone: +39 011 841 321

SEOUL:
Phone: +82 2 780 9636

SHANGHAI:
Phone: +86 21 6431 1690

SINGAPORE:
Phone: +65 836 2777

TAIPEI:
Phone: +886 2 2546 9668

TOKYO:
Phone: +81 3 5531 8041

SYDNEY:
Phone: +612 9957 6700